

JF235

LITHIUM BATTERY



Lifting capacity

13,560 lb



Max tip height

82' 6"



Dimensions (l x w x h)

L x W x H

16' 5" x 5' 11" x 8' 8"



Powered by

Lithium battery



Weight

20,878 lb



EN [ft - lb]



FEATURES



3 BOOM ARTICULATIONS

- Higher boom versatility
- Pass-over obstacles
- Negative angle operation

VERSATILE STABILITY CONFIGURATIONS

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Asymmetric configuration



ENDLESS CRANE CONFIGURATIONS

- Hook** - 13,560 lb capacity
- Winch**
 - 3,300 lb capacity single fall / 6,600 lb 2 falls
 - 130 ft rope
- Hydraulic jib** - 4,575 lb capacity
 - Hook or winch mode
 - 35 ft length fully extended
 - Hydraulic lines for tools
- Independent hydraulic tools** - Easy connection for any tool



INTUITIVE USER INTERFACE

- Radio control**
 - Optimized usability
 - Improved layout
- Touch display:** 7" IP66 heavy duty
 - Live stability area
 - Crane assistant onboard
 - Self-diagnostics & troubleshooting



VARIABLE SPEED MOTOR MANAGEMENT

- Accurate crane movements
- Low consumption
- Low noise



MAN BASKET

- Up to 83 ft height
- Single or two people
- Self-levelling, rotation and height adjustment
- Aluminium, steel or fiberglass
- EN280 certified



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



*Optional



LITHIUM BATTERY POWERED


- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- Integrated BMS - Battery Monitoring System
- On board single & three phase battery charger: 0-80% in 4h 30' (400V)
- Adjustable charging current
- Work while charging

EASY TRANSPORT



DIMENSIONS (ft)

STABILITY AREA (ft)

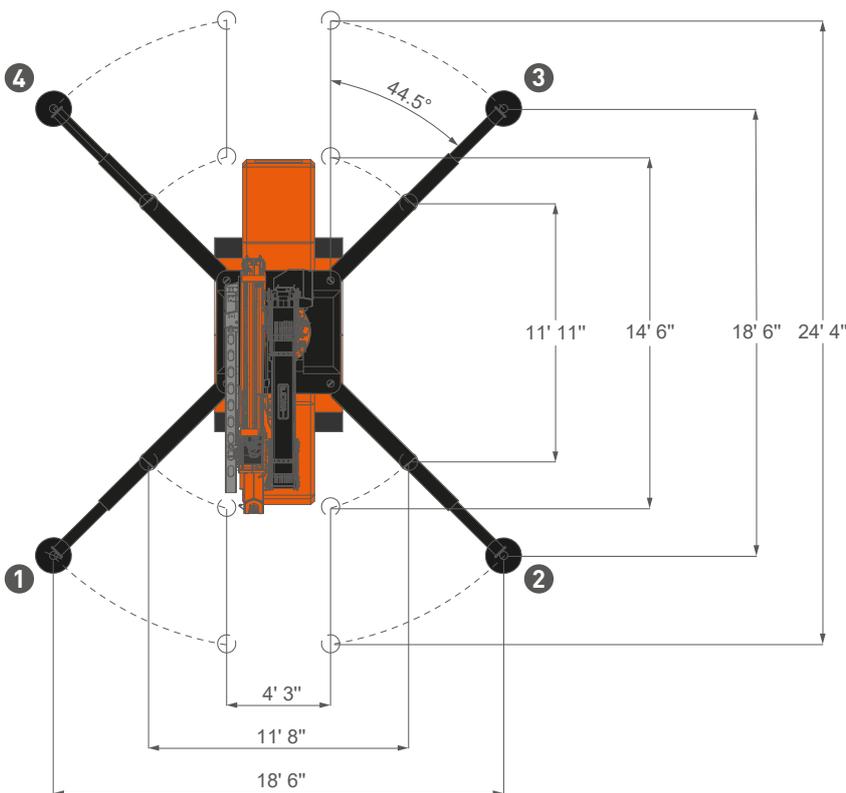


COMPACT FOOTPRINT




LOAD CHARTS

Main Boom

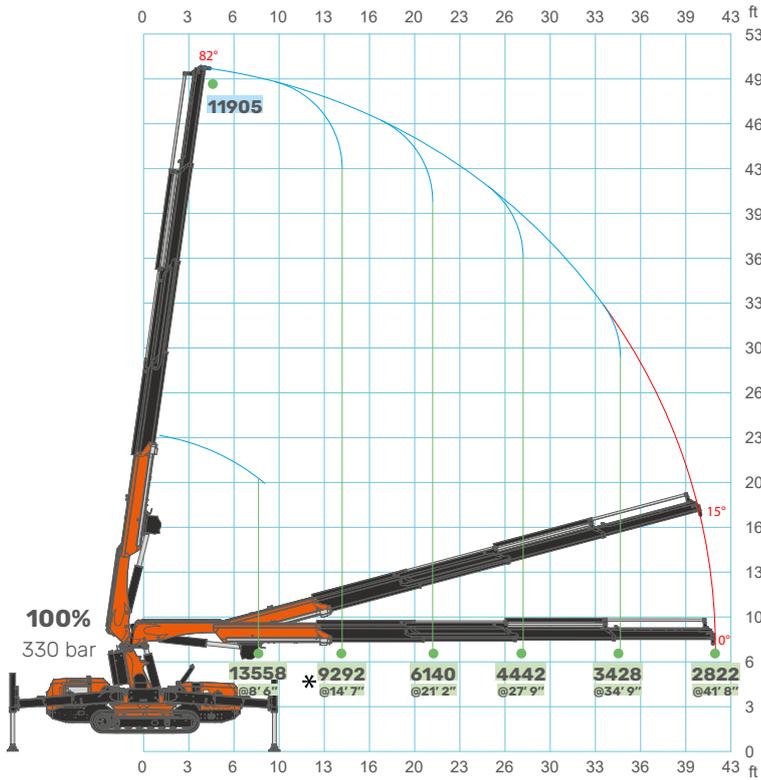

Hydraulic Jib

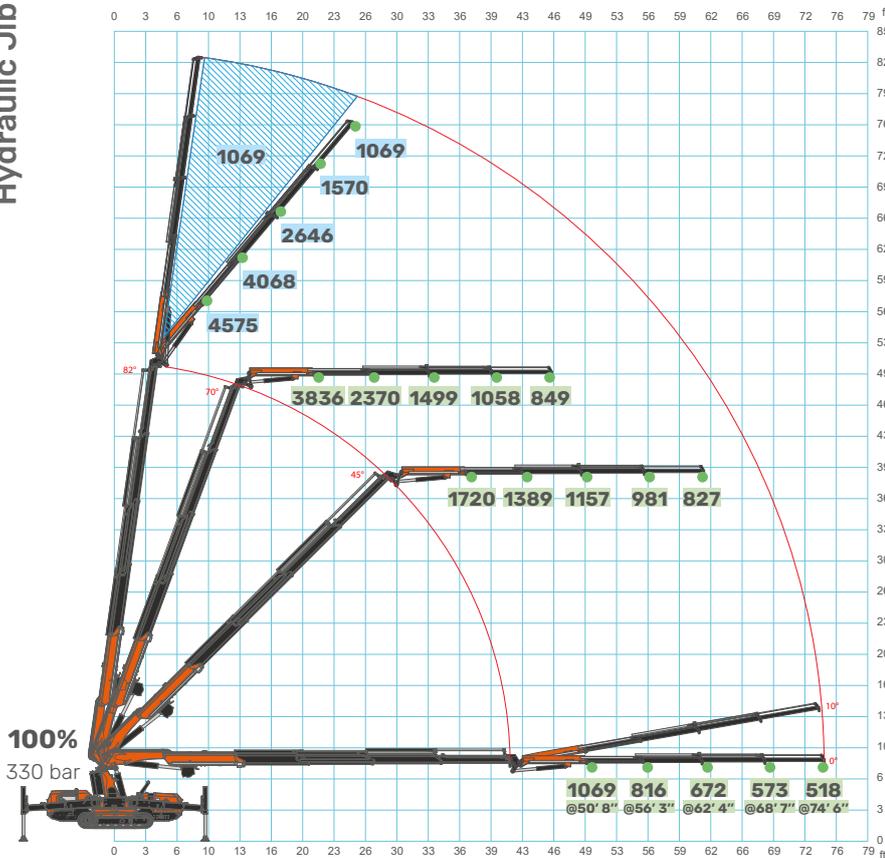

TOOLS AVAILABLE

HYDRAULIC JIB

4,575 lb SWL



MAN BASKET

1 or 2 people



GLASS MANIPULATOR

1,760 lb SWL - JVM800R



SEARCHER HOOK

12,100 lb SWL



MECHANICAL EXTENSIONS



JF235
LITHIUM BATTERY

Jekko USA • info@jekkousa.com • www.jekkousa.com • (800) 670-4103

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.