

JIB500GR

BEAM & PIPE MANIPULATOR



Lifting capacity

1,100 lb



Dimensions (l x w x h)

4'2" x 2'0" x 5'5"



Activation

Hydraulic



Weight

500 lb





EN [ft - lb]

**TOOL COMPATIBLE WITH JEKKO MINI CRANES
SPX532, SPX650 AND SPX1280**

DIMENSIONS_(ft)

MOVEMENTS

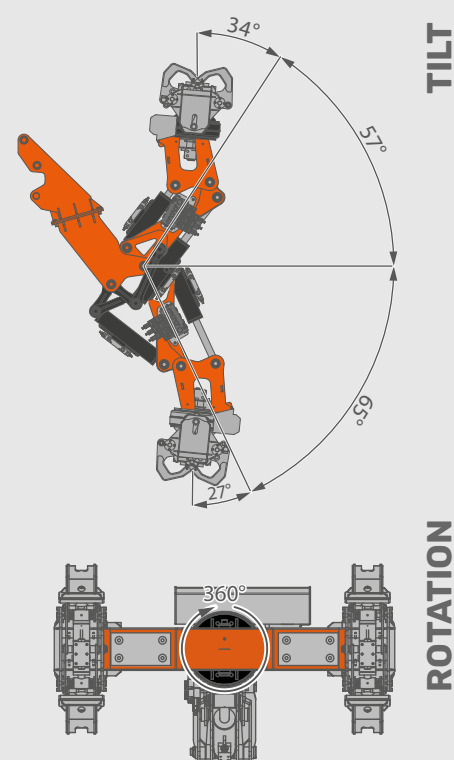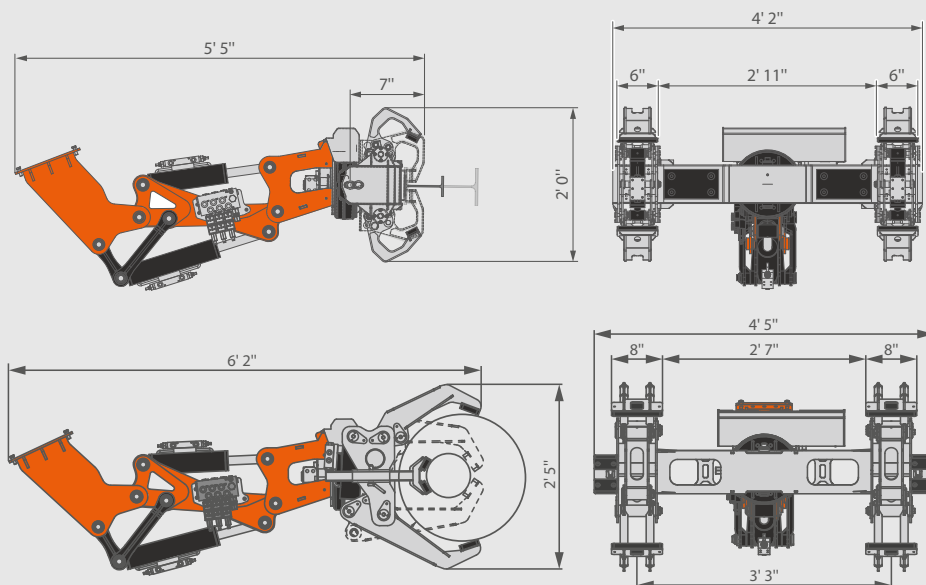

500KG LIFTING CAPACITY

DEDICATED BEAMS & PIPES CLAMPS

- Beam clamp: for IPE, HEA, HEB and similar
- Pipe clamp: for 4" - 1'4" diameter
- Quick clamp installation



WIDE MOVEMENTS RANGE

- 360° continuous rotation
- Wide tilt with double articulation:
 - 57° / +65° tilt A
 - 34° / +27° tilt B



PLUG & PLAY

- Completely hydraulic
- Fully integrated with the crane
- Controlled by crane radio control



TRANSPORT TRAY

- Practical and sturdy
- Easy to install



*Optional



JIB500GR
BEAM & PIPE MANIPULATOR

Jekko USA • info@jekkouusa.com • www.jekkouusa.com • (800) 670-4103

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.

V25.06