

MPK06.2

2IN1 MINIPICKER:
GLASS ROBOT & PICK&CARRY CRANE



Lifting capacity

1,320 lb



Max tip height

14' 1"



Dimensions (l x w x h)

7'10" x 2'5" x 4'9"



Powered by

Battery



Weight

2,020 lb


1,600 lb machine
420 lb removable ballast



EN [ft - lb]

J-Link
Works With
 Trackunit


WORKING MODES

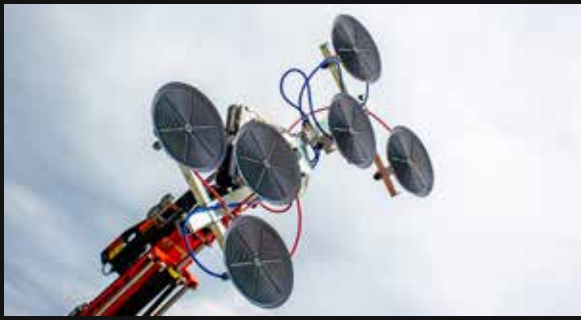


VACUUM MANIPULATOR 1,320 lb

- Up to 6 pads, modular layout
- Electrically operated via wired control
- Vacuum pump onboard
- Two independent vacuum circuits
- 360° rotation, tilt and swing
- Ø1' 4" or Ø11" pads for glass, marble and slabs
- Special pads for monopanel
- "Blow-off" function for easy release
- Ball joint on pads for improved adaptability


ENDLESS PADS CONFIGURATIONS




Standard

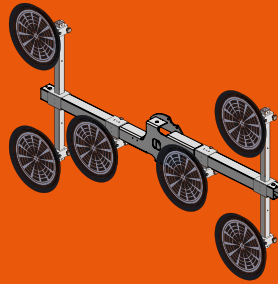


Ø1'4" - 6 pads

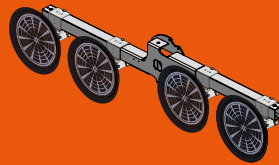

Ø1'4" in-line

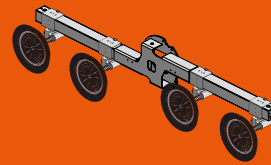



Ø11" in-line



Monopanel

and more...

Manipulator Load Chart

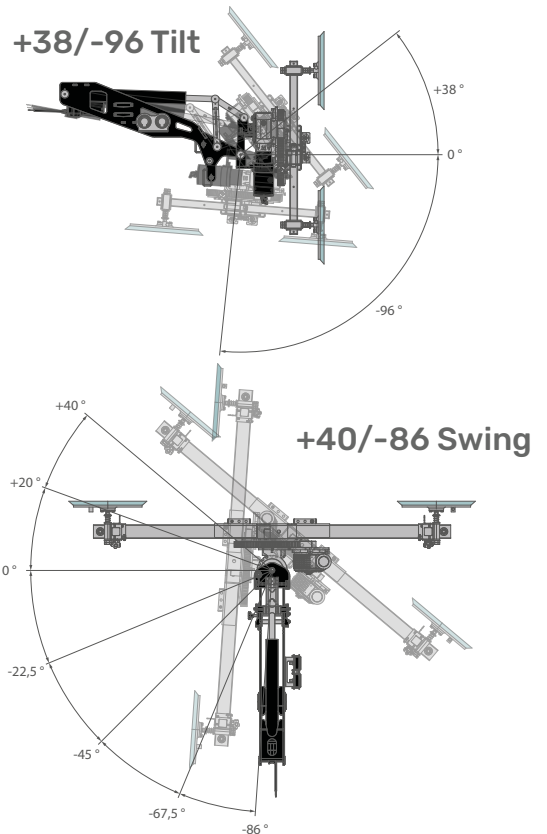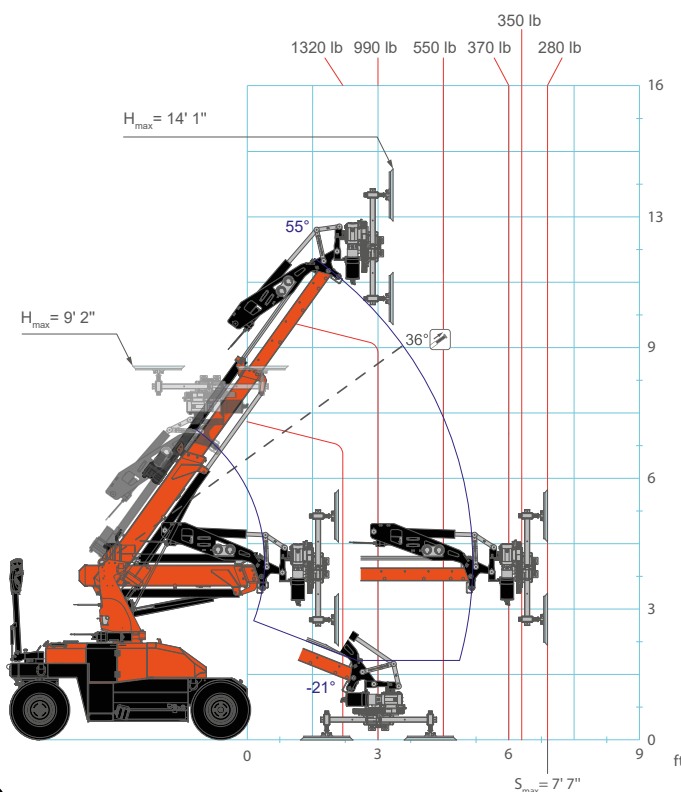

SEARCHER HOOK

- 4 angles: +15° / 0° / -30° / -60°
- Increases versatility
- Stowed onboard



1,320 lb

MANIPULATOR HOOK

- Quickly installed on manipulator frame
- Electrical tilt and swing


880 lb

HOOK


1,320 lb




Searcher Hook Load Chart

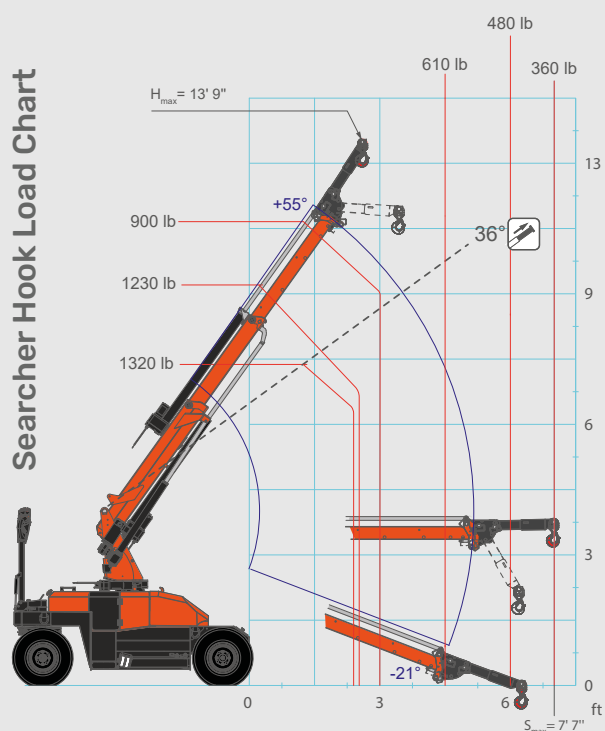

Manipulator Hook Load Chart

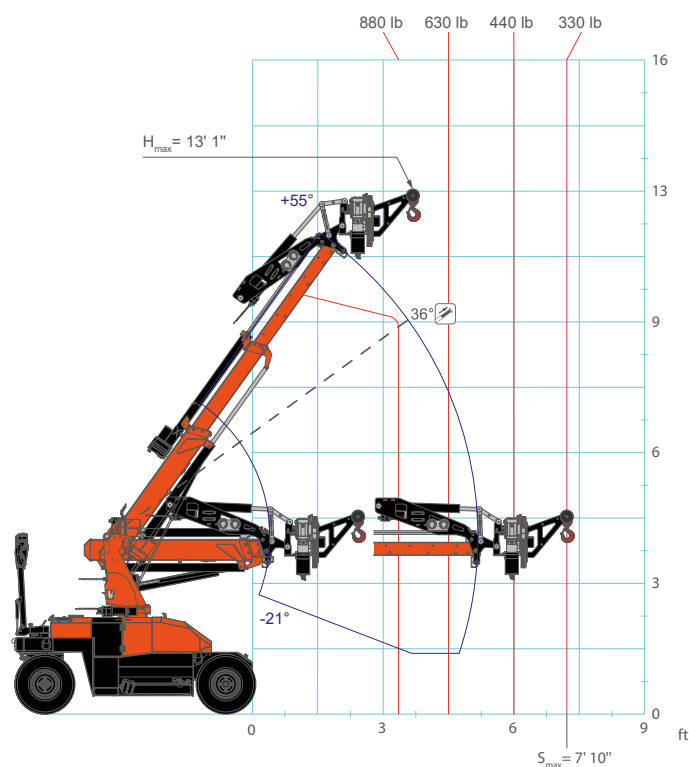

Hook Load Chart

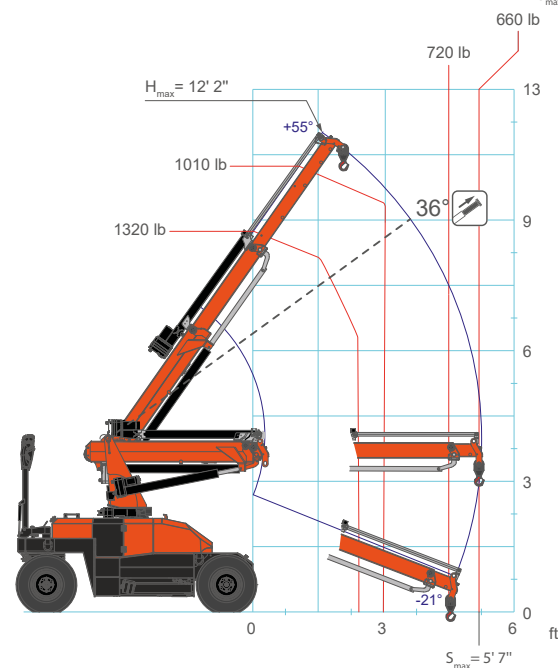



WIRED CONTROL

- Simple and intuitive
- Controls machine driving, crane and manipulator
- Self-diagnostics & emergency button



BOOM MOBILITY

- Turret side rotation $\pm 10^\circ$
- -21° to $+55^\circ$ boom angle
- Double boom extension


FULLY ELECTRIC

- Battery powered, lead-acid type 24 V 155 Ah
- Minimal maintenance costs
- Emission-free indoor operation
- On board 110V or 230V fast battery charger
- Runtime over 1 workday



MODULAR BALLAST

- Easily removable ballast modules
- Operates with reduced ballast
- Automatic lifting capacity adjustment
- 420 lb total weight

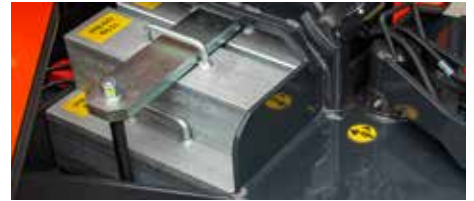

EASY TO DRIVE EVERYWHERE

- Front-wheel drive with differential
- Wide steering angle
- Side stabilisers



OUTDOOR-INDOOR WHEELS

- Off-road tyres (foamed puncture-proof)
- Non-marking white tyres for indoor *



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



*Optional



MPK06.2
2IN1 MINIPICKER

Jekko USA • info@jekkousa.com • www.jekkousa.com • (800) 670-4103
Specifications are subject to change without notice.
All data provided is for reference purposes only and is not legally binding.

V25.06