

SPX1280

LITHIUM BATTERY



Lifting capacity

17,630 lb



Max tip height

87' 7"



L x W x H

Dimensions (l x w x h)

19' 2" x 4' 9" x 6' 9"



Powered by


Lithium battery



Weight

17,420 lb

3,300 lb counterweight included

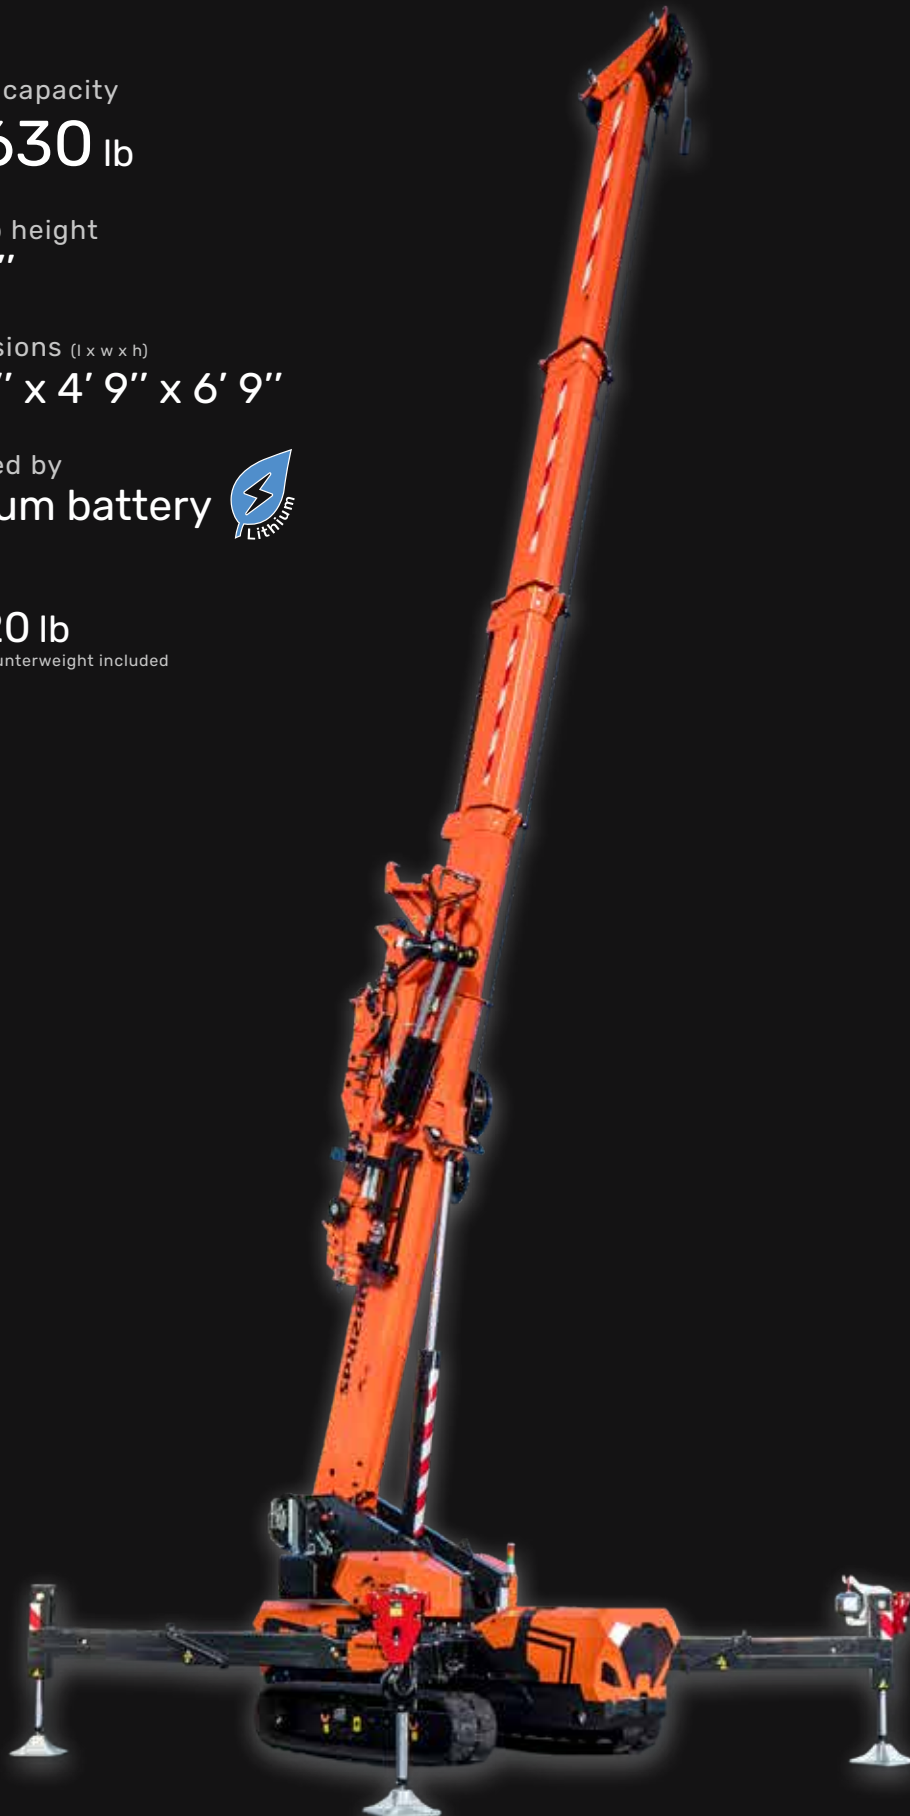

EN [ft - lb]



FEATURES



STABILITY & PERFORMANCE

- Optimal tip height/footprint ratio
- 87' 7" max tip height
- Only 15' 1" x 15' 1" max footprint
- Removable counterweight: minimizes ground pressure

LITHIUM BATTERY POWERED

- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- On board single & three phase battery charger
- Adjustable charging current
- Work while charging



ENDLESS CRANE CONFIGURATIONS

- Winch:** 410' 1" rope
- 3,300 lb capacity single fall / 17,630 lb 6 falls
- Hook block stowing
- Hydraulic jib** - 3,300 lb SWL
- Hook or winch
- +10/-60° angle, up to 25' 3" length
- Tools:** Plug&Play connection



ACCURATE LOAD HANDLING

- Dynamic load sway control
- Automatic speed adjustment to ensure smooth and precise maneuvers
- Automatic movement limitation to maximise safety
- Components engineered to maximise stiffness and load stability



SAFETY SYSTEMS

- Full LMI system
- Anti crash system
- Feedback on display



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



*Optional



4,400 LB PICK & CARRY

- Up to 4,400 lb lifting capacity
- 360° turret rotation
- Extendable crawler for improved driving


EASY TRANSPORT

- Precise and easy to drive



DIMENSIONS (ft)

STABILITY AREA (ft)

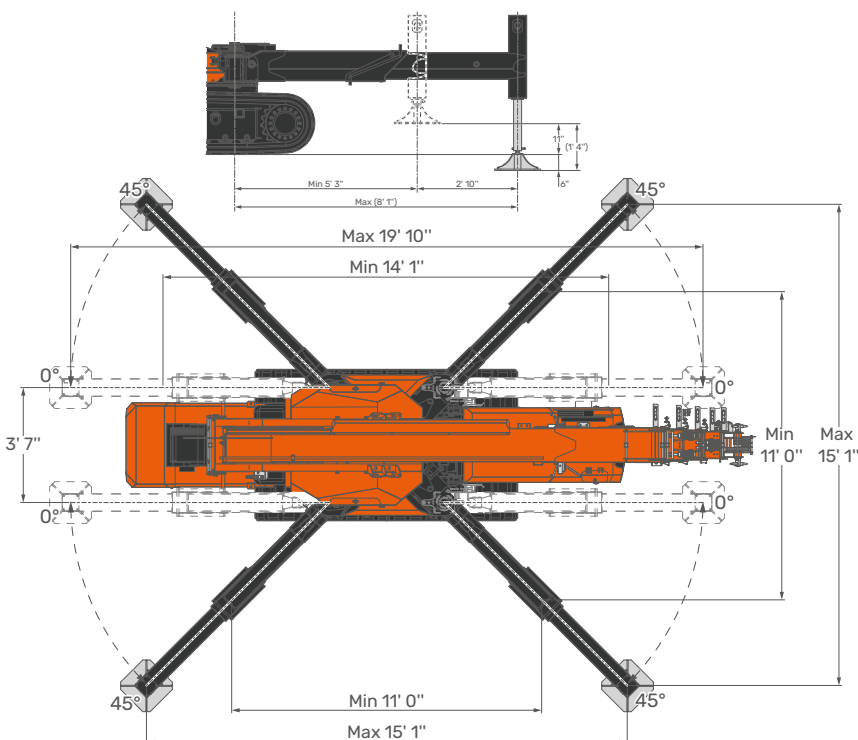


COMPACT FOOTPRINT

- Stepless outriggers rotation 0°/45°
- Stepless telescopic outriggers extension
- Self-levelling




LOAD CHARTS

Main Boom

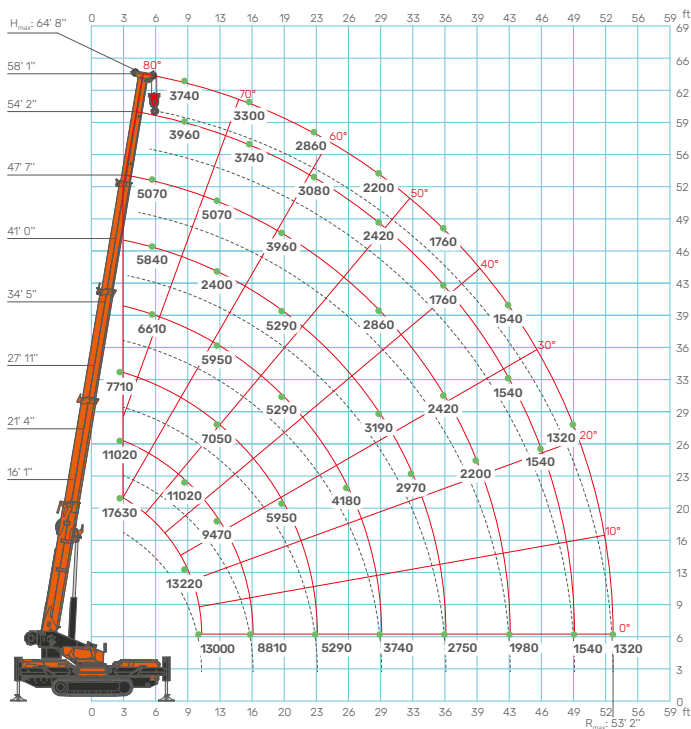

Hydraulic Jib

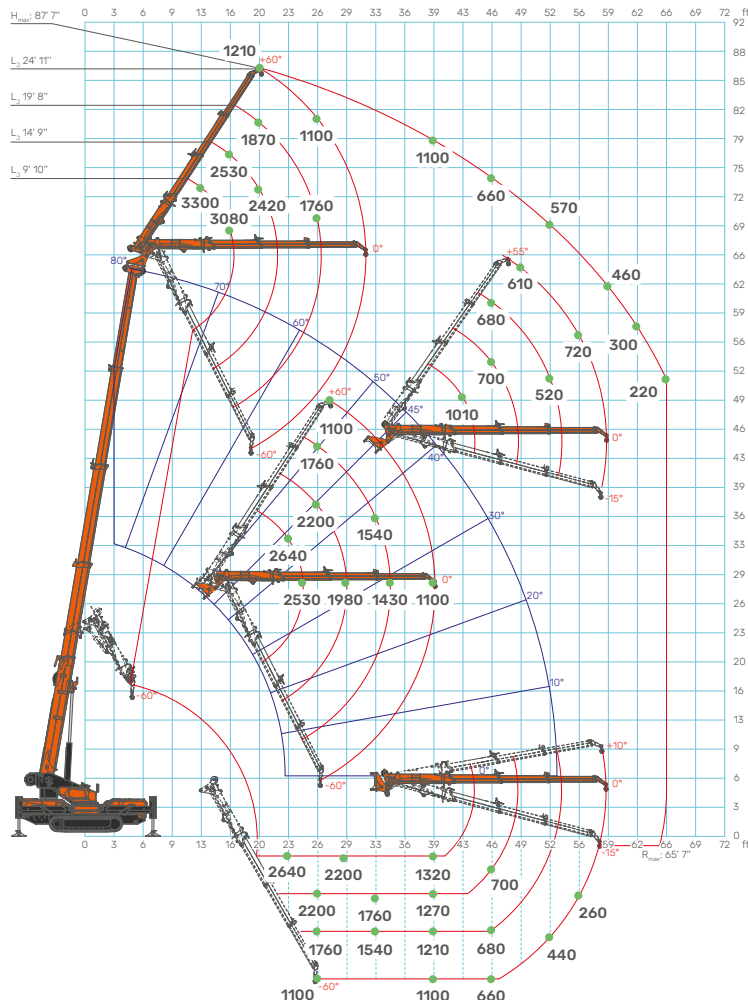

TOOLS AVAILABLE

HYDRAULIC JIB

3,300 lb SWL



TWO-SECTION LATTICE JIB

3,300 lb SWL



SEARCHER HOOK

7,710 lb SWL



BEAM/PIPE MANIPULATOR

1,100 lb SWL - JIB500GR



GLASS MANIPULATOR

1,760 lb SWL - JVM800R



SPX1280
LITHIUM BATTERY

Jekko USA • info@jekkouusa.com • www.jekkousa.com • (800) 670-4103

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.