

SPX328 EVO

LITHIUM BATTERY




 Lifting capacity
MAX 5,950 lb

 Max tip height
42' 8"

 Dimensions (l x w x h)
9'10" x 2'5" x 5'3"

 Powered by
Lithium battery 

 Weight
5,290 lb

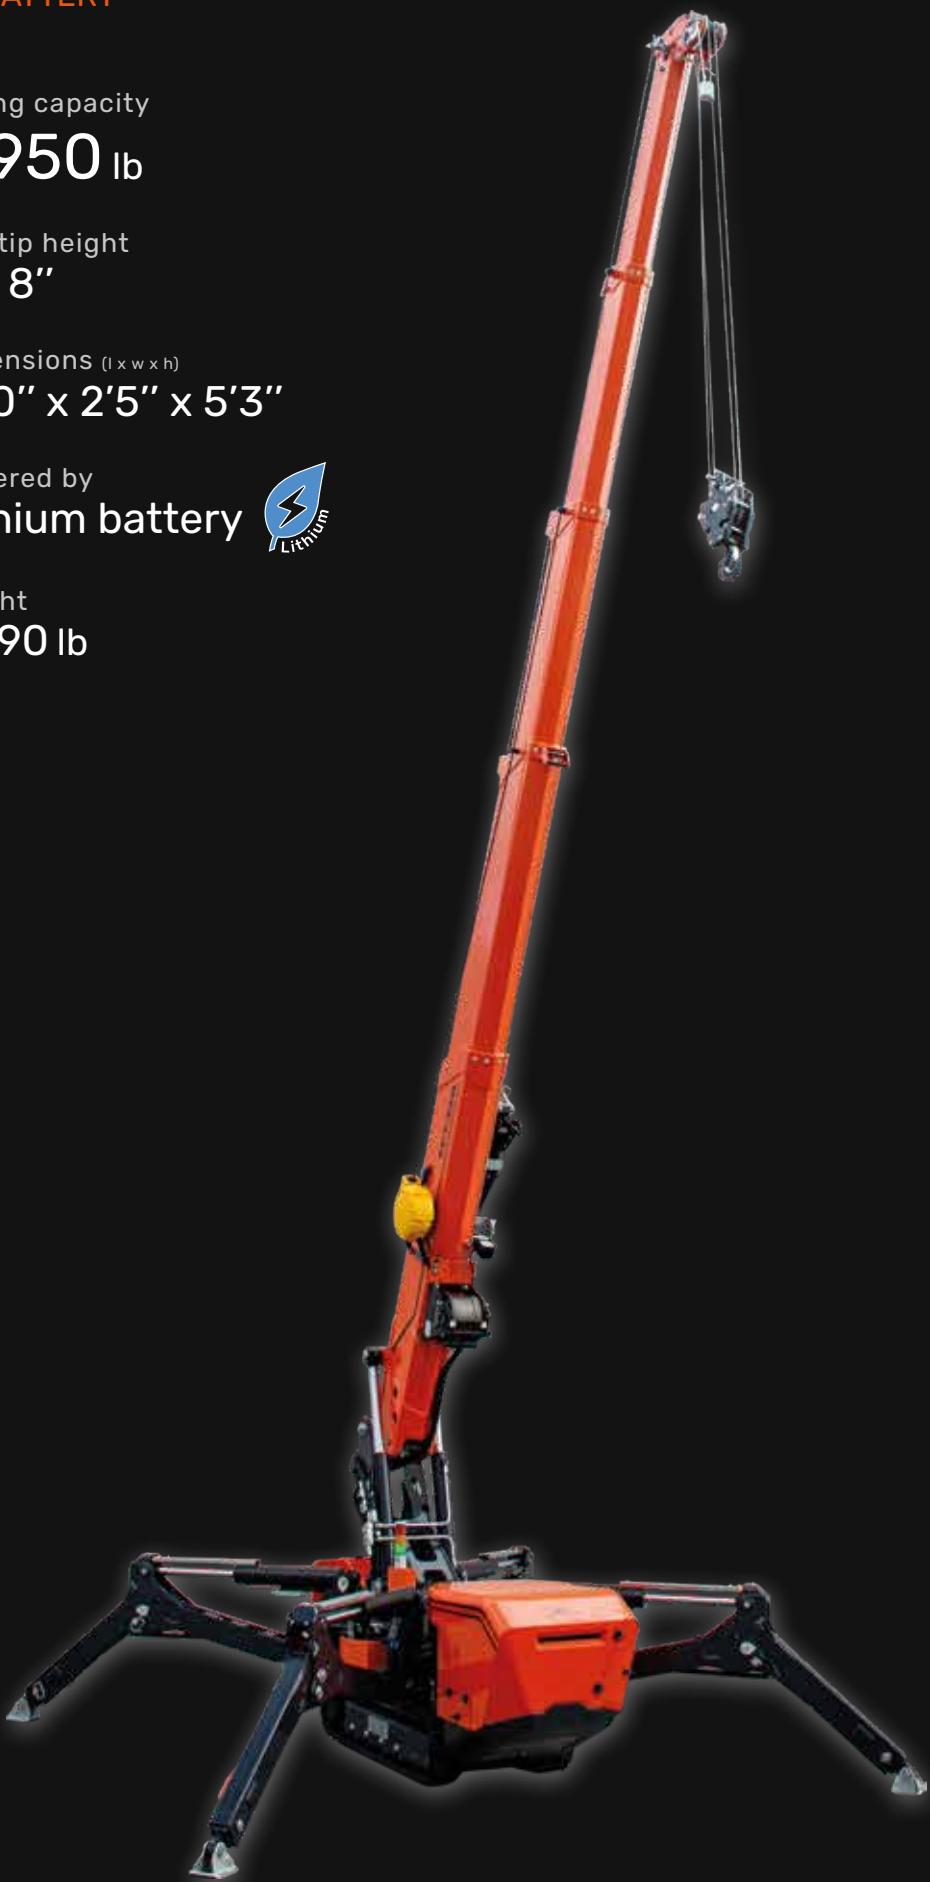

EN [ft - lb]


J-Link
 Works With
Trackunit[®]

FEATURES



REVOLUTIONARY TOUCH EXPERIENCE

- 10" IP66 heavy duty touch display
- Live load-chart and stability area
- Video tutorials & assistant onboard
- Self-diagnostics & troubleshooting

LITHIUM BATTERY POWERED

- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- On board 110/230V fast charger: 0-80% in 3 h (110V: 4:30 h)
- Adjustable charging current
- Work while charging



ENDLESS CRANE CONFIGURATIONS

Hook

- Unique drop-down design, fast hook-winch switch

Winch

- Two options: 1,540 lb-203' / 1,320 lb-443'
- 1 / 2 / 4 falls
- Pulley block recovery

Tools: Plug&Play connection



PICK & CARRY

- Up to 700 lb lifting capacity



ACCURATE LOAD HANDLING

- Dynamic load sway control
- Automatic speed adjustment to ensure smooth and precise maneuvers
- Automatic movement limitation to maximise safety
- Components engineered to maximise stiffness and load stability



SAFETY SYSTEMS

- Full LMI system
- Anti crash system
- Feedback on display



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units





EVO

Higher lifting capacity in reduced stability

- The best lifting capacity/footprint ratio
- Lifting capacity in any stability condition

Variable-speed Motor Management


- +25% runtime
- +20% speed

SINGLE DOORWAY

- Precise and easy to drive
- Non-marking white tracks for indoor*




SINGLE DOORWAY (2' 7")

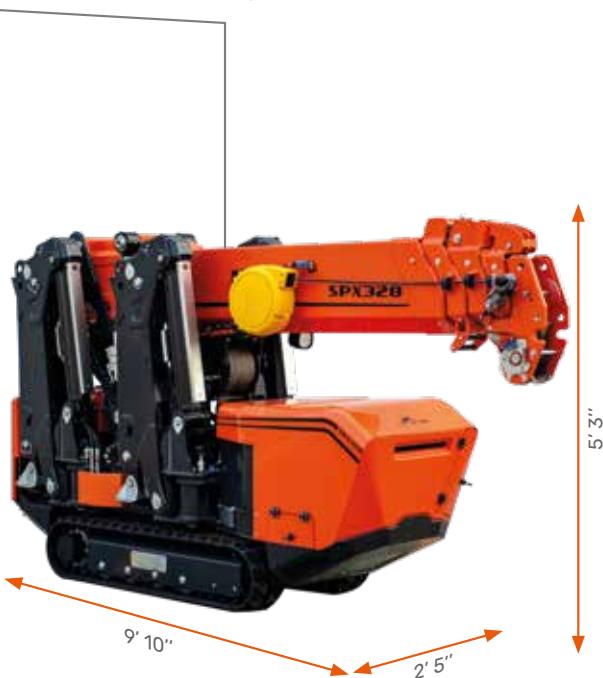

DIMENSIONS (ft)

STABILITY AREA (ft)


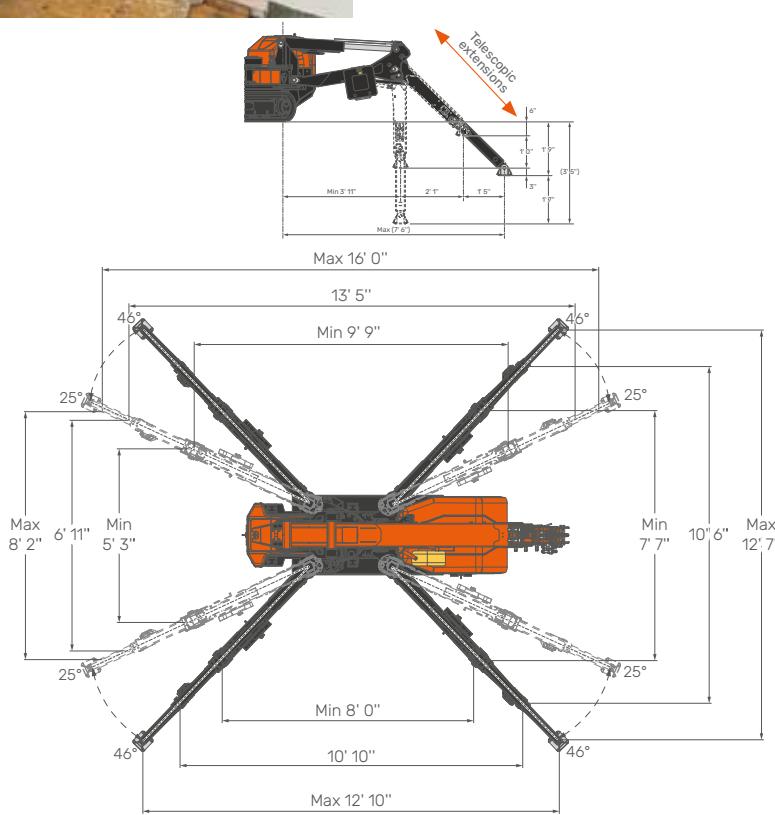


THE SMALLEST FOOTPRINT

- Independent outriggers configuration
- 3 outrigger set-ups
- Self-levelling



LOAD CHARTS

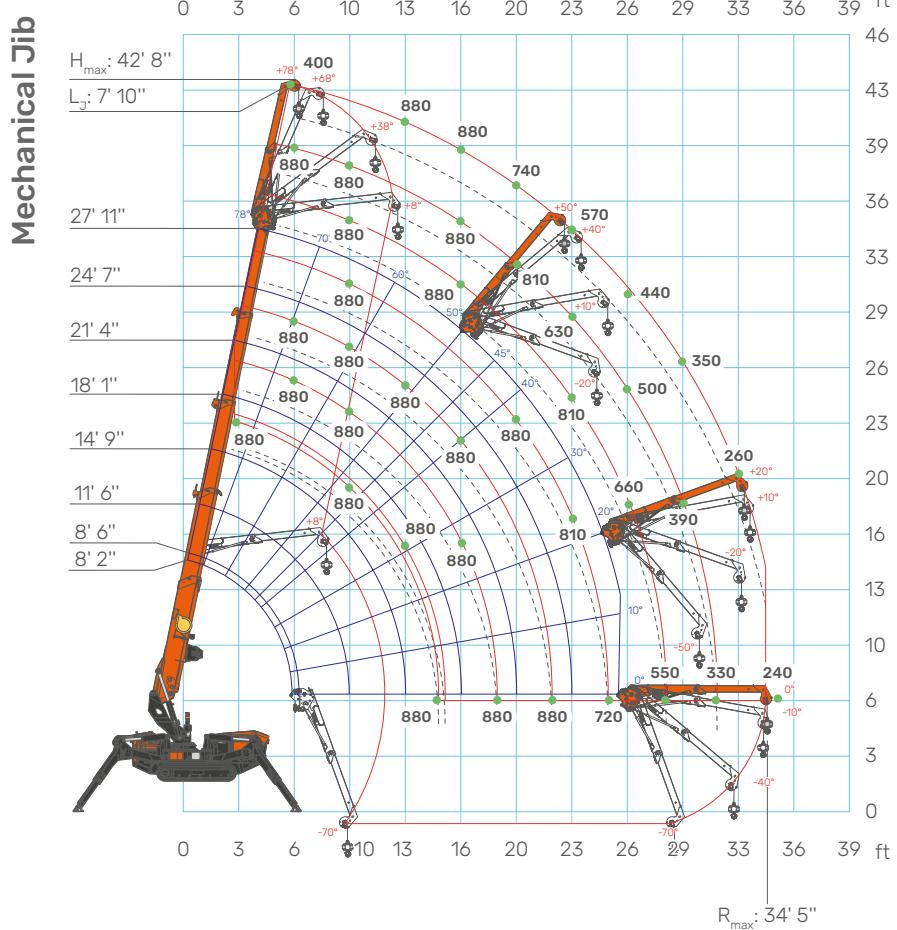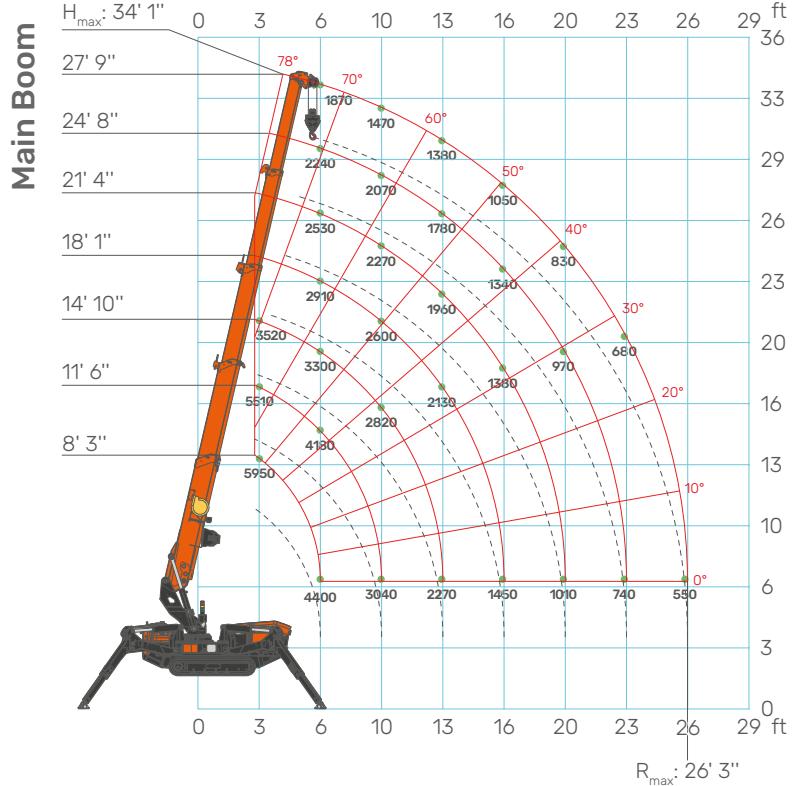

TOOLS AVAILABLE

MECHANICAL JIB

880 lb SWL



ELECTRIC JIB

660 lb SWL



SEARCHER HOOK

2,200 lb SWL



GLASS MANIPULATOR

1,760 lb SWL - JVM800R



SPX328 EVO
LITHIUM BATTERY

Jekko USA • info@jekkousa.com • www.jekkousa.com • (800) 670-4103

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.