

SPX532.2

DIESEL BI-ENERGY



Lifting capacity

5,950 lb



Max tip height

55' 10"



Dimensions (l x w x h)

10'4" x 2'6" x 6'6"



Powered by

Bi-Energy

Diesel + Electric Power Pack



Weight

5,850 lb



EN [ft - lb]



FEATURES



INTUITIVE USER INTERFACE

Radio control

- Optimized usability
- Improved layout

Touch display

- 7" IP66 heavy duty
- Live load-chart and stability area
- Crane assistant onboard
- Self-diagnostics & troubleshooting

DIESEL BI-ENERGY POWERED

Diesel engine

- 18,5 kW Kubota diesel engine
- Variable Speed Engine Management: low consumption, low noise, faster crane movements

Electric Power Pack *

- On board motor: 100% electric operation
- Emission-free and noise-free indoor operation
- Single/threephase motors for every Country



ENDLESS CRANE CONFIGURATIONS

Hook - Fast hook/winch switch

Winch: 262'6" rope

- 1,760 lb capacity single fall / 5,950 lb 4 falls

Hydraulic jib - 2,200 lb SWL

- Hook or winch
- +16/-80° angle, up to 17'2" length
- Unique self-installation system

Tools: Plug&Play connection



PICK & CARRY

- Up to 880 lb lifting capacity
- 360° turrett rotation
- Extendable crawler for improved driving



ACCURATE LOAD HANDLING

- Dynamic load sway control
- Automatic speed adjustment to ensure smooth and precise manoeuvres
- Automatic movement limitation to maximise safety
- Components engineered to maximise stiffness and load stability



J-LINK POWERED BY TRACKUNIT*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units





HIGH LIFTING CAPACITY IN REDUCED STABILITY


- Optimal lifting capacity/footprint ratio
- Lifting capacity in any stability condition

SINGLE DOORWAY

- Precise and easy to drive
- Non-marking white tracks for indoor*




SINGLE DOORWAY (2' 7")

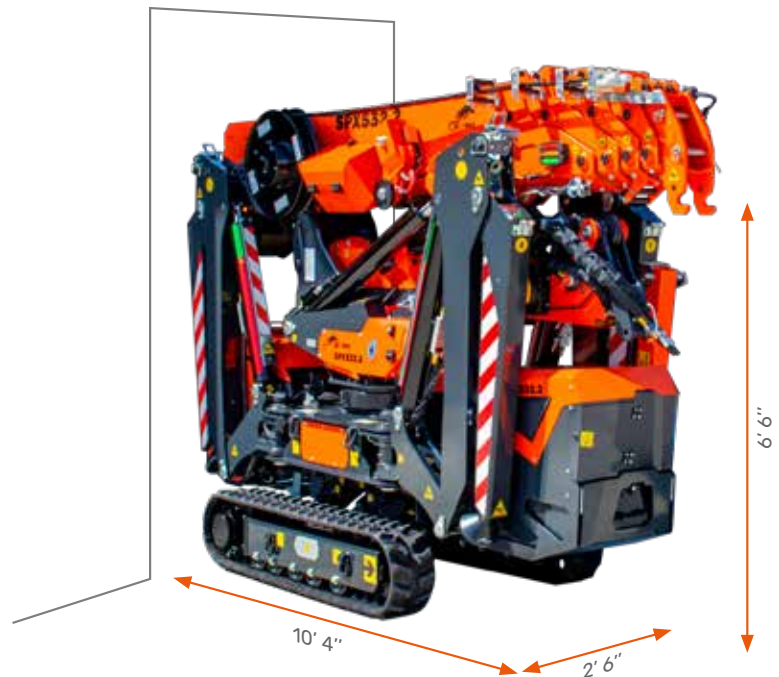

DIMENSIONS (ft)

STABILITY AREA (ft)


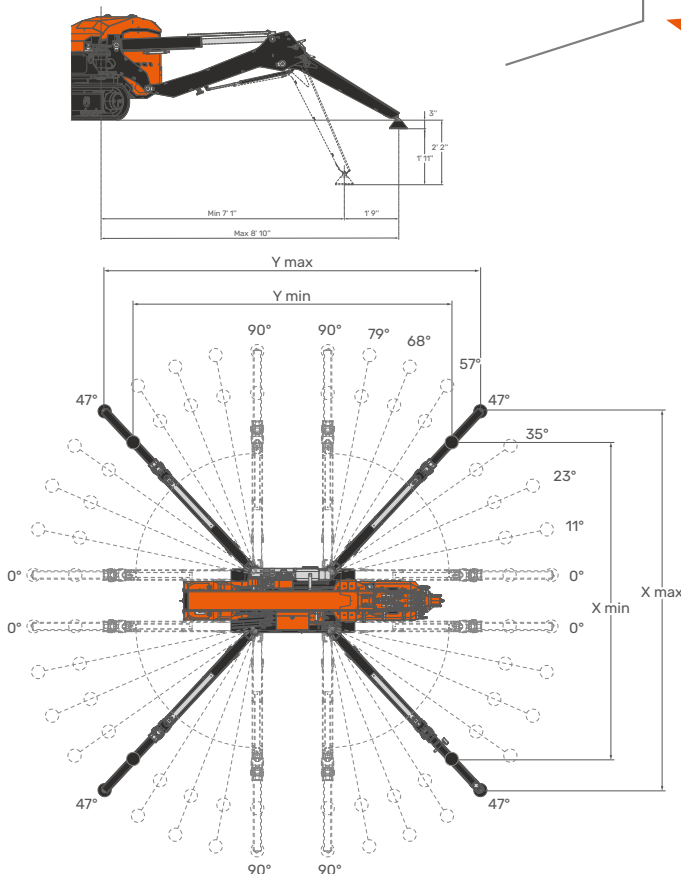


COMPACT FOOTPRINT

- 9 outriggers steps 0°/90°, independent configuration
- 2 outrigger extensions
- Self-levelling



LOAD CHARTS

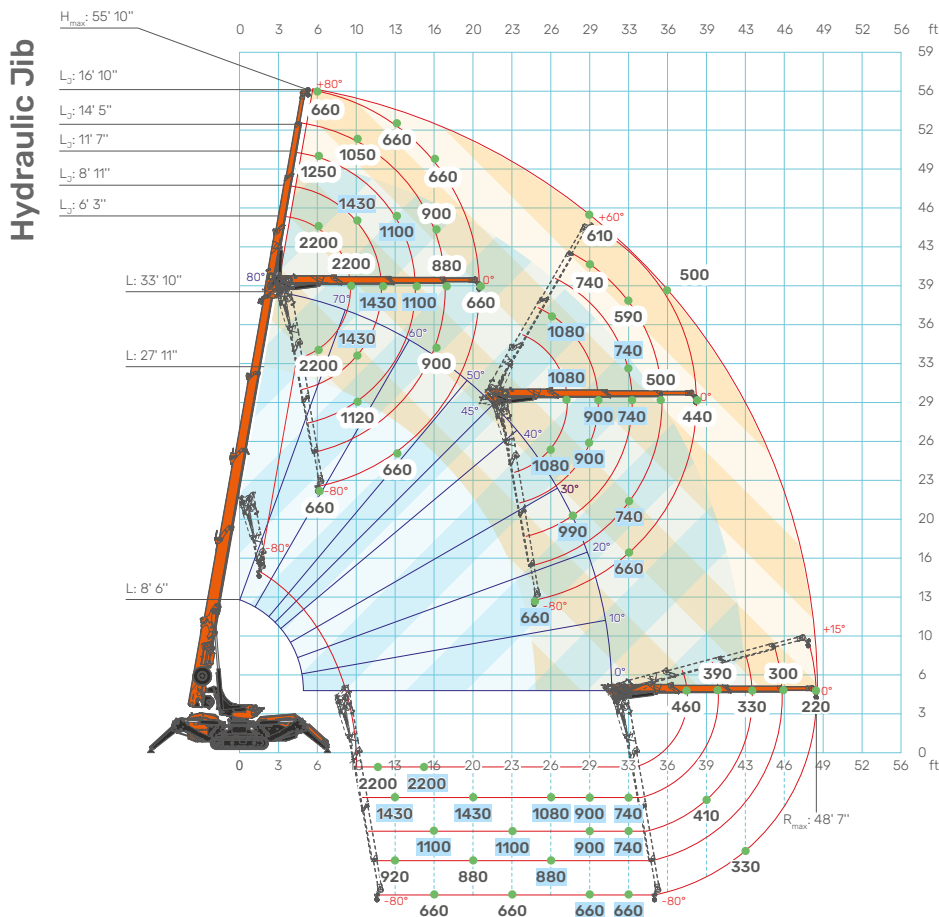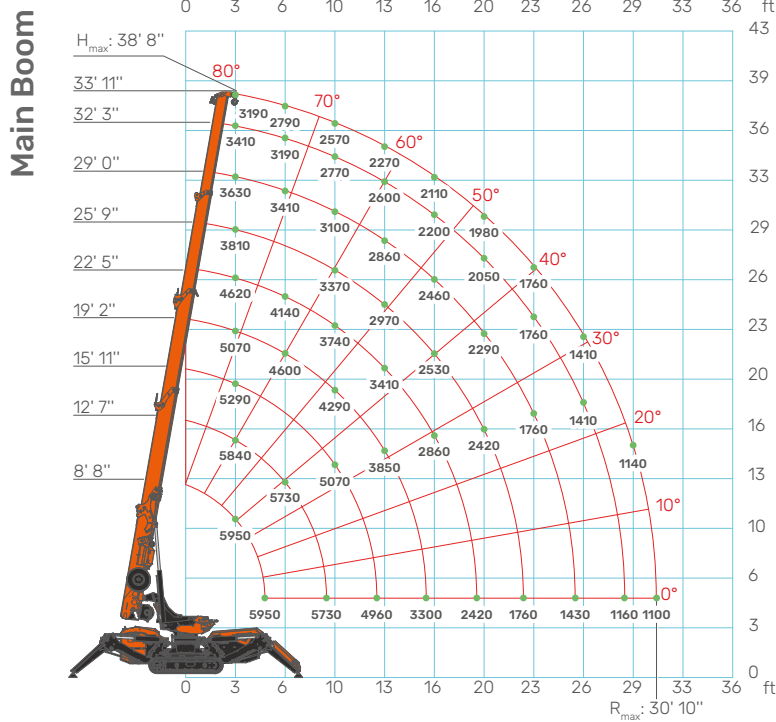

TOOLS AVAILABLE

HYDRAULIC JIB 2,200 lb SWL



SEARCHER HOOK 2,640 lb SWL



BEAM/PIPE MANIPULATOR 1,100 lb SWL - JIB500GR



GLASS MANIPULATOR 1,760 lb SWL - JVM800R



SPX532.2
DIESEL BI-ENERGY

Jekko USA • info@jekkousa.com • www.jekkousa.com • (800) 670-4103

Specifications are subject to change without notice.

All data provided is for reference purposes only and is not legally binding.