

# SPX650

LITHIUM BATTERY



Lifting capacity

11,020 lb



Max tip height

77' 9"



Dimensions (l x w x h)

L x W x H

14' 8" x 3' 3" x 6' 10"




Powered by

Lithium battery



Weight

12,780 lb

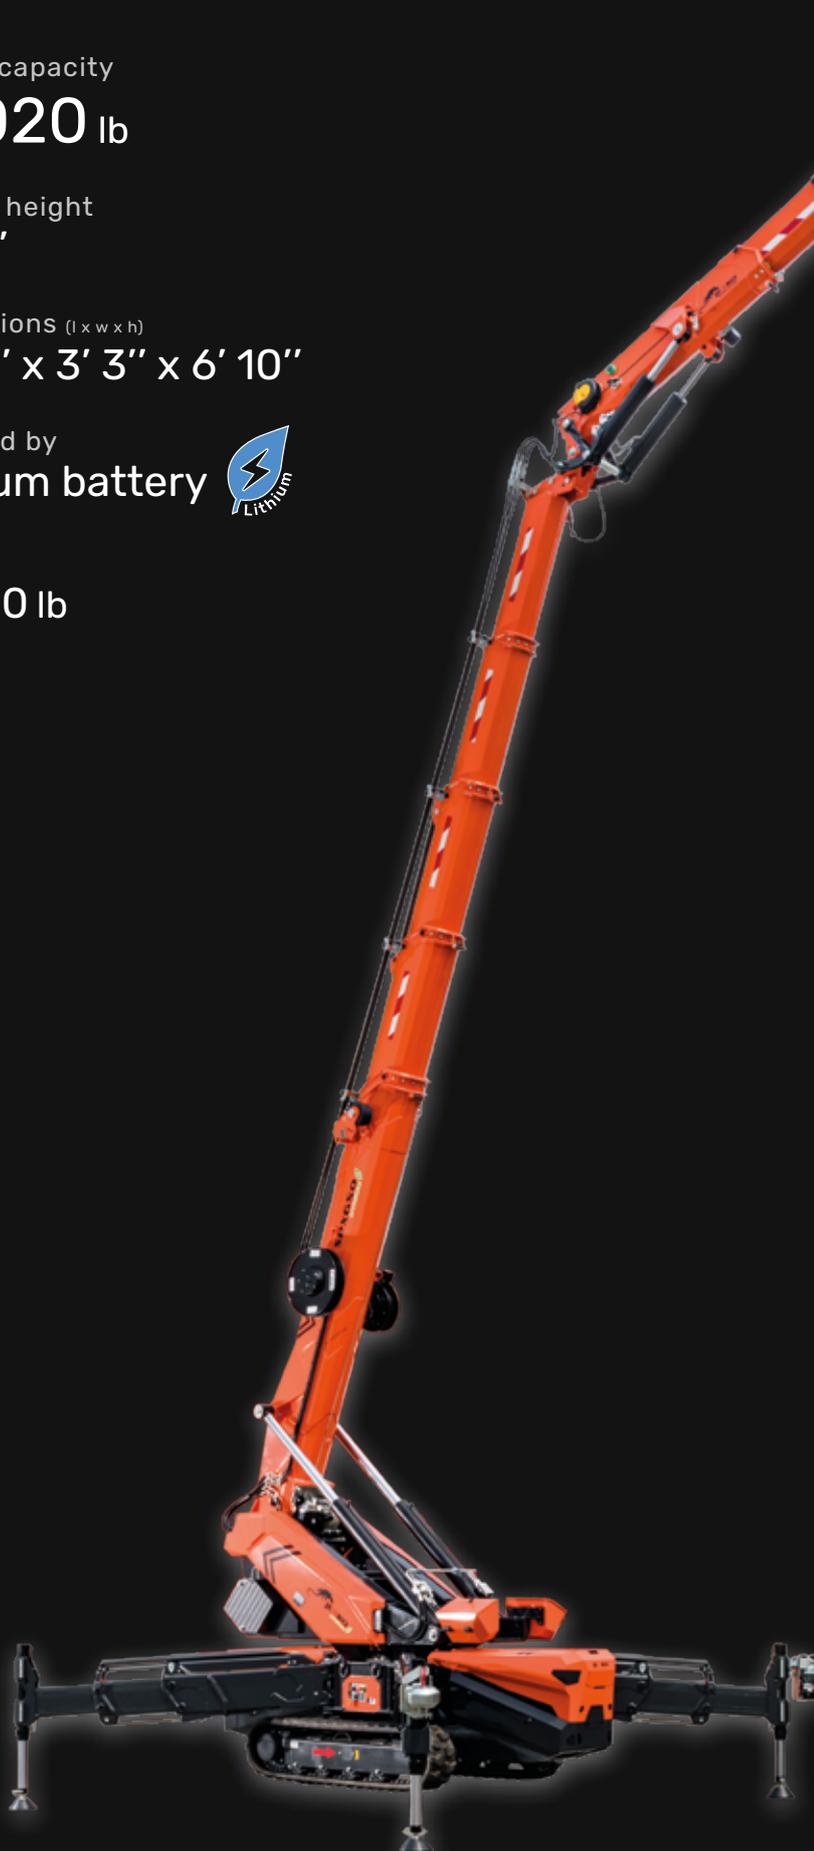

EN [ft - lb]



# FEATURES



## STRENGTH AND PRECISION

- Unmached structure design
- Engineered to maximise stiffness and load stability
- Dynamic load sway control for accurate load handling
- Automatic speed adjustment to ensure smooth and precise maneuvers
- Automatic movement limitation to maximise safety

### LITHIUM BATTERY POWERED

- Indoor operation, emission free
- Maintenance free
- Runtime over 1 workday
- On board 110/230V charger: 0-80% in 5h 30' (110v: 7h 30')
- External 400V fast charger: 0-80% in 2h 15'
- Adjustable charging current
- Work while charging



### ENDLESS CRANE CONFIGURATIONS

- Hook** - Fast hook/winch switch
- Winch**: 262' 6" rope
  - 1,760 lb capacity single fall / 10,580 lb 6 falls
  - Hook block stowing
- Hydraulic jib** - 2,640 lb SWL
  - Hook or winch
  - +15/-80° angle, up to 19' 9" length
  - Unique self-installation system
- Tools**: Plug&Play connection




### PICK & CARRY

- Up to 1,760 lb lifting capacity
- 360° turrett rotation
- Extendable crawler for improved driving



### SAFETY SYSTEMS

- Full LMI system
- Anti crash system
- Feedback on display

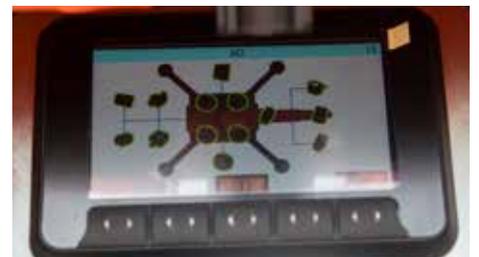

### J-LINK POWERED BY TRACKUNIT\*

- Remote fleet monitoring and diagnostics
- Built-in or retrofit on existing units



\*Optional



## WIDE STABILITY SOLUTIONS

- Optimal lifting capacity/footprint ratio
- Stepless outriggers rotation 0°/70°
- Stepless telescopic outriggers extension
- Adjustable outriggers height
- Self-levelling


## EASY TRANSPORT

- Precise and easy to drive
- Non-marking white tracks for indoor\*



**DIMENSIONS** (ft)

**STABILITY AREA** (ft)


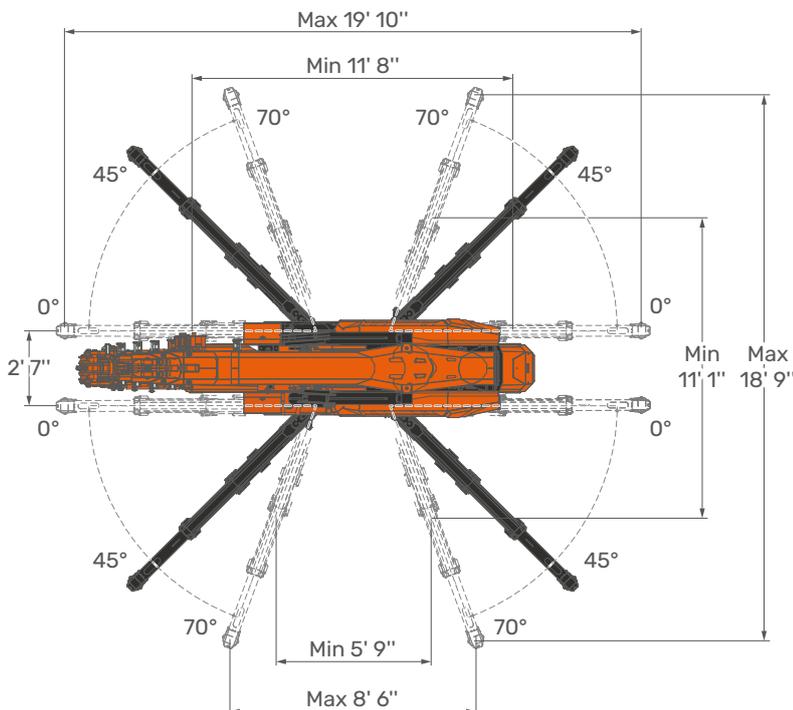


## COMPACT FOOTPRINT

- Infinite outriggers configurations
- Self-levelling



# LOAD CHARTS

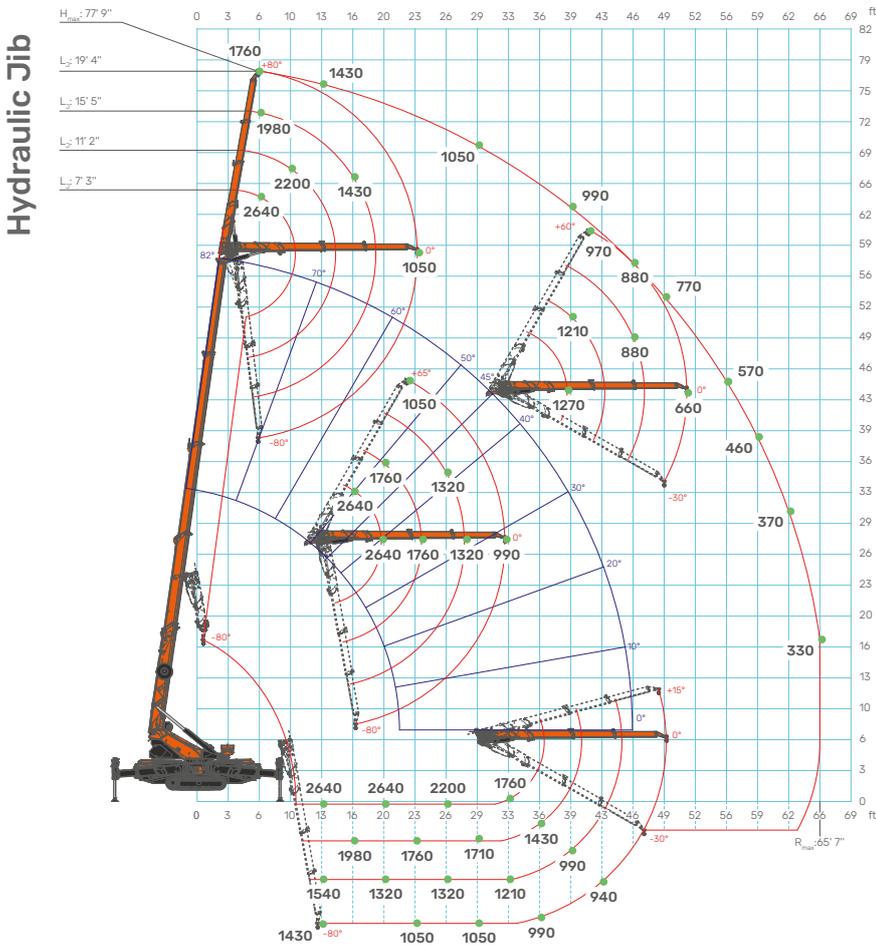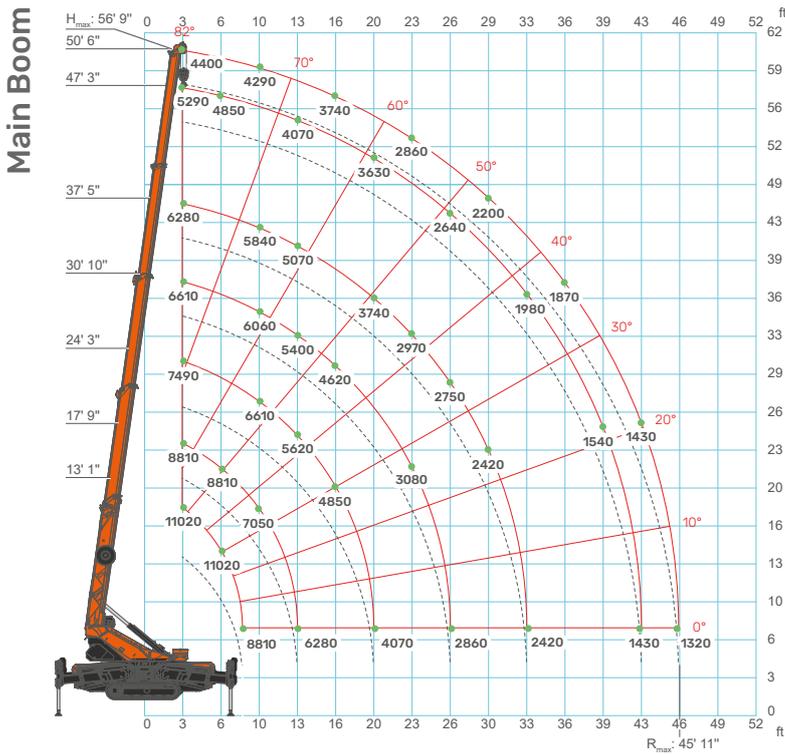

# TOOLS AVAILABLE

## HYDRAULIC JIB 2,640 lb SWL



## SEARCHER HOOK 4,400 lb SWL



## BEAM/PIPE MANIPULATOR 1,100 lb SWL - JIB500GR



## GLASS MANIPULATOR 1,760 lb SWL - JVM800R



**SPX650**  
LITHIUM BATTERY

Jekko USA • [info@jekkousa.com](mailto:info@jekkousa.com) • [www.jekkousa.com](http://www.jekkousa.com) • (800) 670-4103  
Specifications are subject to change without notice.  
All data provided is for reference purposes only and is not legally binding.